


BLENDING NEW PAINT INTO EXISTING PAINT


1 PRIMER

After prepping the area, begin by applying the primer heaviest over the damaged area, decreasing spray density (with each coat) as you move out and away from the scratched paint.

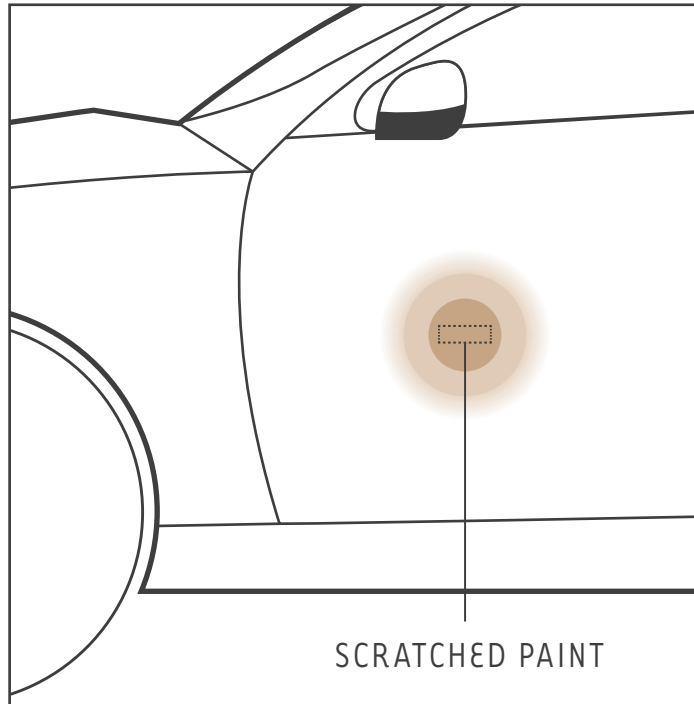

2 BASECOAT COLOR

Apply the base coat color heaviest over the now primed area decreasing, spray density (with each coat) as you move out and away from the primed area.

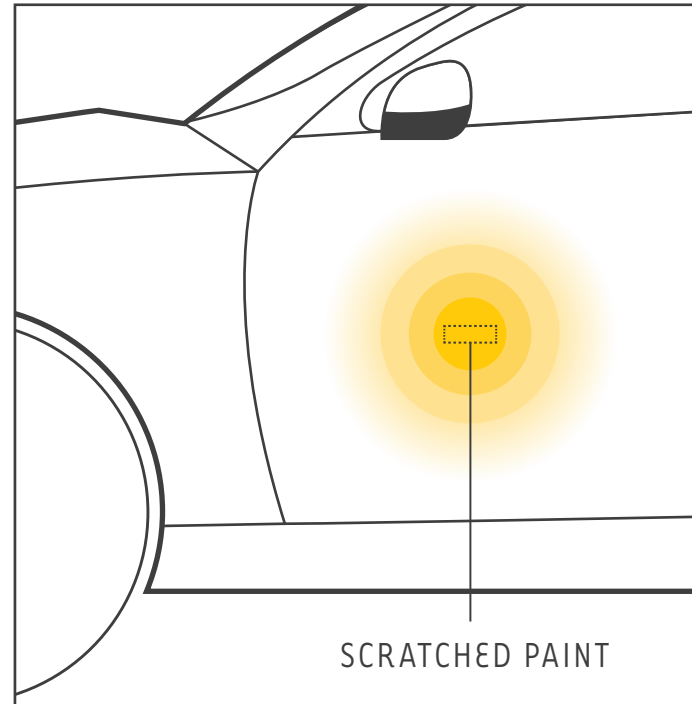

3 CLEARCOAT

Apply the clear coat evenly across the entire affected section of the vehicle. Coverage should extend beyond the newly painted area, continuing outward to the seams.

